

BOLT

- MOTOR: 1.5 HP / 1.1 kW.
- DISC Ø: 250 mm
- MAX DEPTH OF CUT: 55 mm - 2 1/8".
- AVAILABLE LENGTHS OF CUT/VERSIONS:
BOLT 90: 90 cm - 35 1/2"
BOLT 120: 120 cm - 47 1/4"
BOLT 150: 150 cm - 59".
- MAX TILE SIZE FOR DIAGONAL CUTTING:
BOLT 90: 63x63 cm - 25"x25"
BOLT 120: 85x85 cm - 33 1/2"x33 1/2"
BOLT 150: 105x105 cm - 41 3/8"x 41 3/8".
- ALUMINUM SLIDING BAR, COLUMNS AND DISC COVER.
- EASY-TO-REMOVE ALUMINUM WORK BENCHES FOR EASY CLEANING AND MAXIMUM STURDINESS.
- RE-ADJUSTABLE ALUMINUM SQUARE.
- COATED METAL FRAME.
- PLUNGE CUT.
- MOTOR MOVES ON 4 POLYPROPYLENE PULLEYS.



Askøy
Murerverktøy AS

- EACH PULLEY IS REINFORCED WITH 2 INSIDE BEARINGS.
- PULLEYS ARE EASY TO RE-ADJUST (TIGHTEN): AVOID PLAY AND CONFER LONG LASTING PRECISION OF CUT.
- MOTOR HELD BY GALVANIZED METAL FRAME.
- TILTING LEGS.
- TILTING MOVEMENT FOR 45° ANGLE CUT (JOLLY).
- STACK UP TO 4 MACHINES TO MINIMIZE VOLUME FOR TRANSPORT ON TRUCK/CONTAINER.
- SUPPLIED WITH Ø 250 mm (10") DIAMOND DISC FOR PORCELAIN TILES AND USER MANUAL.
- AVAILABLE ACCESSORIES:
 - EXTRA SIDE SQUARE;
 - 4 WHEELS + 2 HANDLES KIT;
 - WHEEL FEED KIT (ONLY FOR BOLT 120 AND BOLT 150);
 - SELF STANDING SIDE TABLE WITH ROLLERS.




CODE	DESCRIPTION	LENGTH OF CUT	DIAGONAL CUT*	DEPTH OF CUT	MOTOR POWER	VOLTAGE	NET WEIGHT	GROSS WEIGHT	PACKAGING SIZE
225MS 90EU	BOLT 90	90 cm 35 1/2"	63x63 cm 25x25"	5.5 cm 2 1/8"	1.5 HP / 1.1 kW	230V 50 Hz	46 Kg 101 lbs	56 Kg 123 lbs	130x58xh55 cm 51"x23"xh21 5/8"
225MS 90BR						230V 60 Hz			
225MS 90US						110V 60 Hz			
225MS 90GB						110V 50 Hz			
225MS120EU	BOLT 120	120 cm 47 1/4"	85x85 cm 33 1/2"x 33 1/2"	5.5 cm 2 1/8"	1.5 HP / 1.1 kW	230V 50 Hz	50 Kg 110 lbs	70 Kg 154 lbs	165x65xh55 cm 65"x25 5/8"xh21 5/8"
225MS120BR						230V 60 Hz			
225MS120US						110V 60 Hz			
225MS120GB						110V 50 Hz			
225MS150EU	BOLT 150	150 cm 59"	105x105 cm 41 3/8"x 41 3/8"	5.5 cm 2 1/8"	1.5 HP / 1.1 kW	230V 50 Hz	54 Kg 119 lbs	72 Kg 159 lbs	195x65xh55 cm 76 3/4"x25 5/8"xh21 5/8"
225MS150BR						230V 60 Hz			
225MS150US						110V 60 Hz			
225MS150GB						110V 50 Hz			

*MAX TILE SIZE


BOLT




transport position

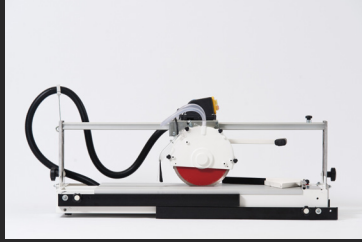


shipment configuration

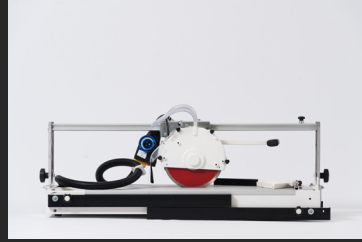

plunge cut (up)

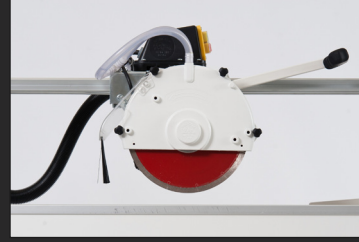

plunge cut (down)

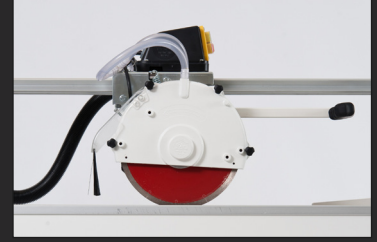

4 Polypropylene pulleys with 2 bearings each



precise and sturdy aluminum square



square perfect also for diagonal cut



re-adjustable aluminum square



tilting movement for 45° angle cut ("jolly")





high capacity double jet water cooling



easy-to-remove aluminum work tables



wheels kit (accessory)

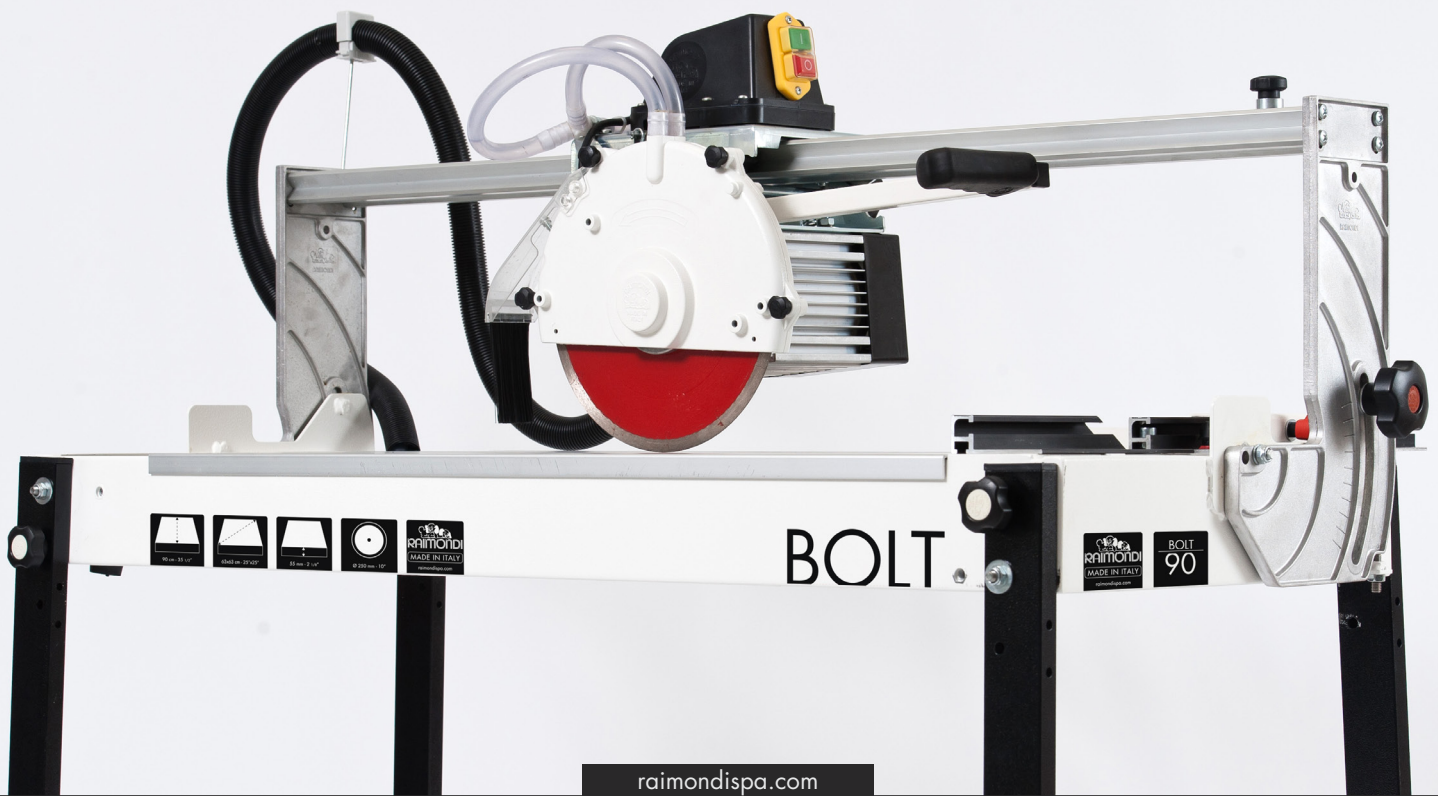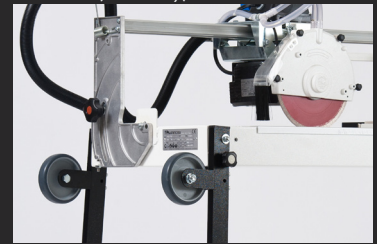

BOLT

RAIMONDI
MADE IN ITALY

BOLT
90